


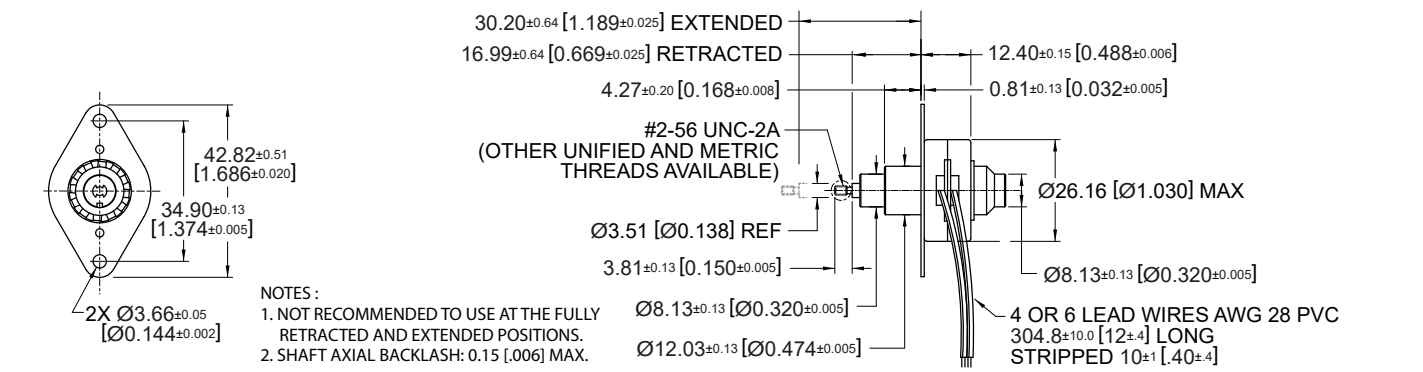

尺寸单位为mm。[英寸]

电气参数		26DAMXX...-K				单位
		D1B双极	D2B双极	D1U单极	D2U单极	
1 工作电压#		5	12	5	12	VDC
2 每相电阻, ±10%		14.6	84.0	14.6	84.0	Ohms
3 每相电感, 典型值		6.5	33.6	3.8	20.5	mH
4 每相额定电流, 1相励磁		0.48	0.20	0.48	0.20	A
5 输入功率		3.4	3.4	3.4	3.4	W

通用参数		XX	每步的线性行程	26DAMXX...-K				单位
				D1B双极	D2B双极	D1U单极	D2U单极	
6 最小保持力@额定电流	10	@ .001" (0.0254mm)		33.4 (120)		20 (72)		N (oz)
	20	@ .002" (0.0508mm)		25 (90)		15.3 (55)		N (oz)
	40	@ .004" (0.1016mm)		14.5 (52)		8.9 (32)		N (oz)
7 最小保持力 (未通电)	10	@ .001" (0.0254mm)			20 (72)			N (oz)
	20	@ .002" (0.0508mm)			13.9 (50)			N (oz)
	40	@ .004" (0.1016mm)			5.56 (20)			N (oz)
8 行程长度, 典型值					13.2 (0.52)			mm (in)
9 线性行程精度					± 1步			
10 每转步数					24			
11 环境温度范围 (运行)					-20 至 +70 (-4 至 +158)			°C (°F)
12 最大线圈温度					130 (266)			°C (°F)
13 轴承类型					滚珠轴承			
14 500 VDC时的绝缘电阻					20			Mohms
15 介电耐压					650, 2秒			VAC
16 重量					34 (1.2)			克 (盎司)
17 引线					AWG #28, UL1429 (80° C, 150 V)			

备注: 1.除非另有说明, 所有电机参数值均为20°C - 2. # 电压驱动器电压 (指示灯R·I)

