


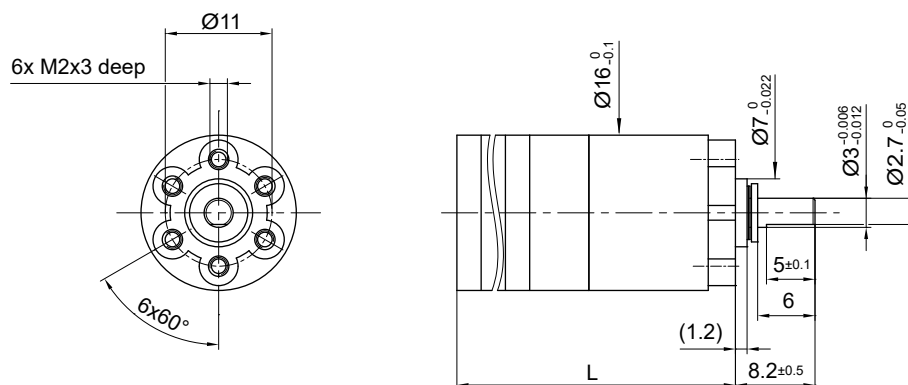

尺寸单位为mm。

比例	22.5	40.5	67.5	121.5	202.5	243	364.5	607.8	1093.5	1822.5	3280.5
1 齿轮级数	3	3	4	4	5	5	5	6	6	7	7
2 旋转方向	=	=	≠	≠	=	=	=	≠	≠	=	=
3 效率	0.72	0.72	0.65	0.65	0.59	0.59	0.59	0.53	0.53	0.48	0.48
4 长度 (mm)	26.7	26.7	29.2	29.2	31.7	31.7	31.7	34.2	34.2	36.7	36.7
5 重量	g (oz)	12 (0.423)	12 (0.423)	13 (0.458)	13 (0.458)	14 (0.493)	14 (0.493)	15 (0.529)	15 (0.529)	16 (0.564)	16 (0.564)

6 可用电机—L2 - 带电机长度(mm)											
16C18	45.4	45.4	47.9	47.9	51.4	51.4	51.4	52.9	52.9	55.4	55.4
16N78	54.7	54.7	57.2	57.2	59.7	59.7	59.7	62.2	62.2	64.7	64.7
16G88	54.7	54.7	57.2	57.2	59.7	59.7	59.7	62.2	62.2	64.7	64.7
17S78	48.4	48.4	50.9	50.9	53.4	53.4	53.4	55.9	55.9	58.4	58.4
17N78	52.6	52.6	55.1	55.1	57.6	57.6	57.6	60.1	60.1	62.6	62.6
P110	45.7	45.7	48.2	48.2	50.7	50.7	50.7	53.2	53.2	55.7	55.7
16DCP/16DCT/17DCT CB	52.7	52.7	55.2	55.2	57.7	57.7	57.7	60.2	60.2	62.7	62.7
16DCP/16DCT/17DCT PM	52.2	52.2	54.7	54.7	57.2	57.2	57.2	59.7	59.7	62.2	62.2

特性	单位	BA16 • 0 •	BA16 2R • 0 •
7 轴承		滑动轴承	滚珠轴承
8 最大静态扭矩	Nm (oz-in)	0.4 (57)	0.4 (56)
9 最大径向力			
@距离安装面8mm处	N (磅)	5 (1.1)	15 (3.3)
10 最大轴向力	N (磅)	5 (1.1)	10 (2.2)
11 最大压装力	N (磅)	200 (44)	200 (44)
12 平均背隙 @ 空载		1.5°	1.5°
13 平均背隙 @ 0.3 Nm		3°	3°
轴窜动:			
14 -径向	µm	≤ 30	≤ 10
15 -轴向	µm	≤ 150	≤ 100
16 最大建议输入速度	rpm	8000	8000
17 工作温度范围:	°C (°F)	-30到+65 (-22到+150)	

